
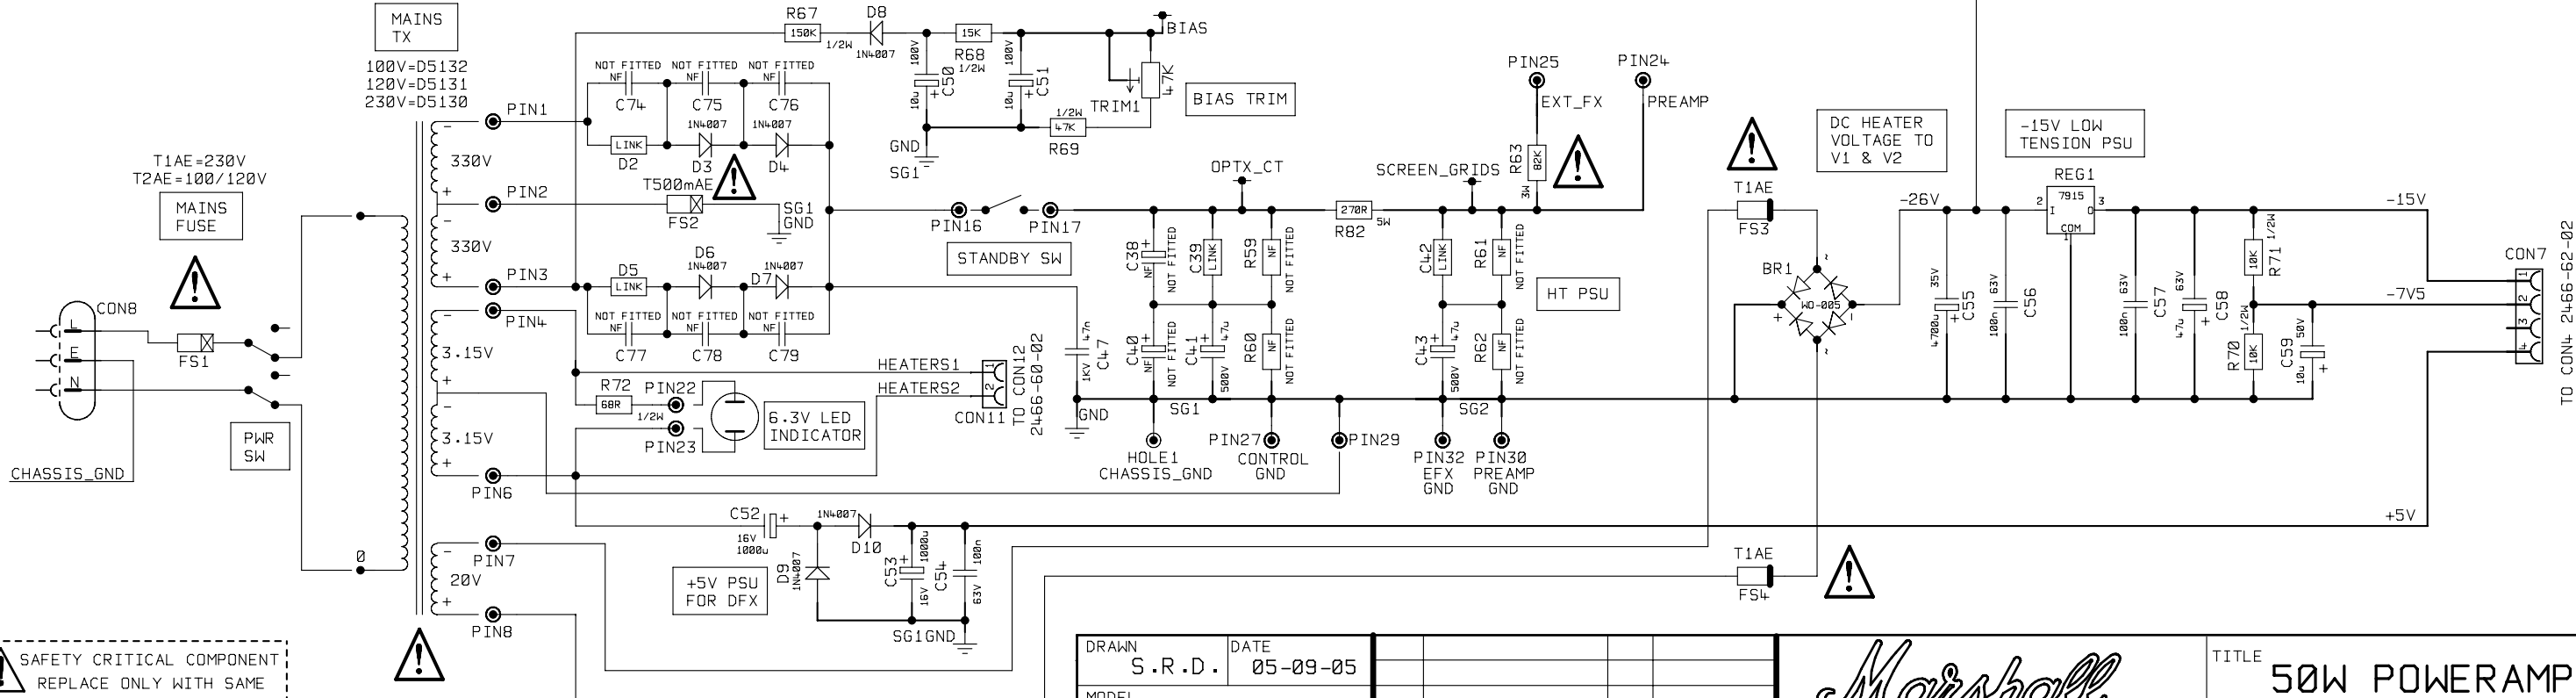
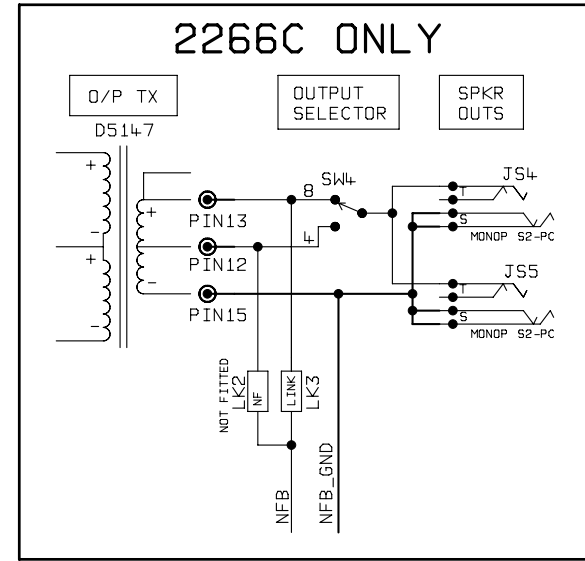


SET THE BIAS TRIM POT TO GIVE 48mV (+/- 2.5mV) AT TP1 & TP2 WRT GROUND. BALANCE THE ERROR BETWEEN TP1 & TP2 EITHER SIDE OF 48mV.

EXAMPLE:
4.7mV AT TP1 AND 4.9mV AT TP2.

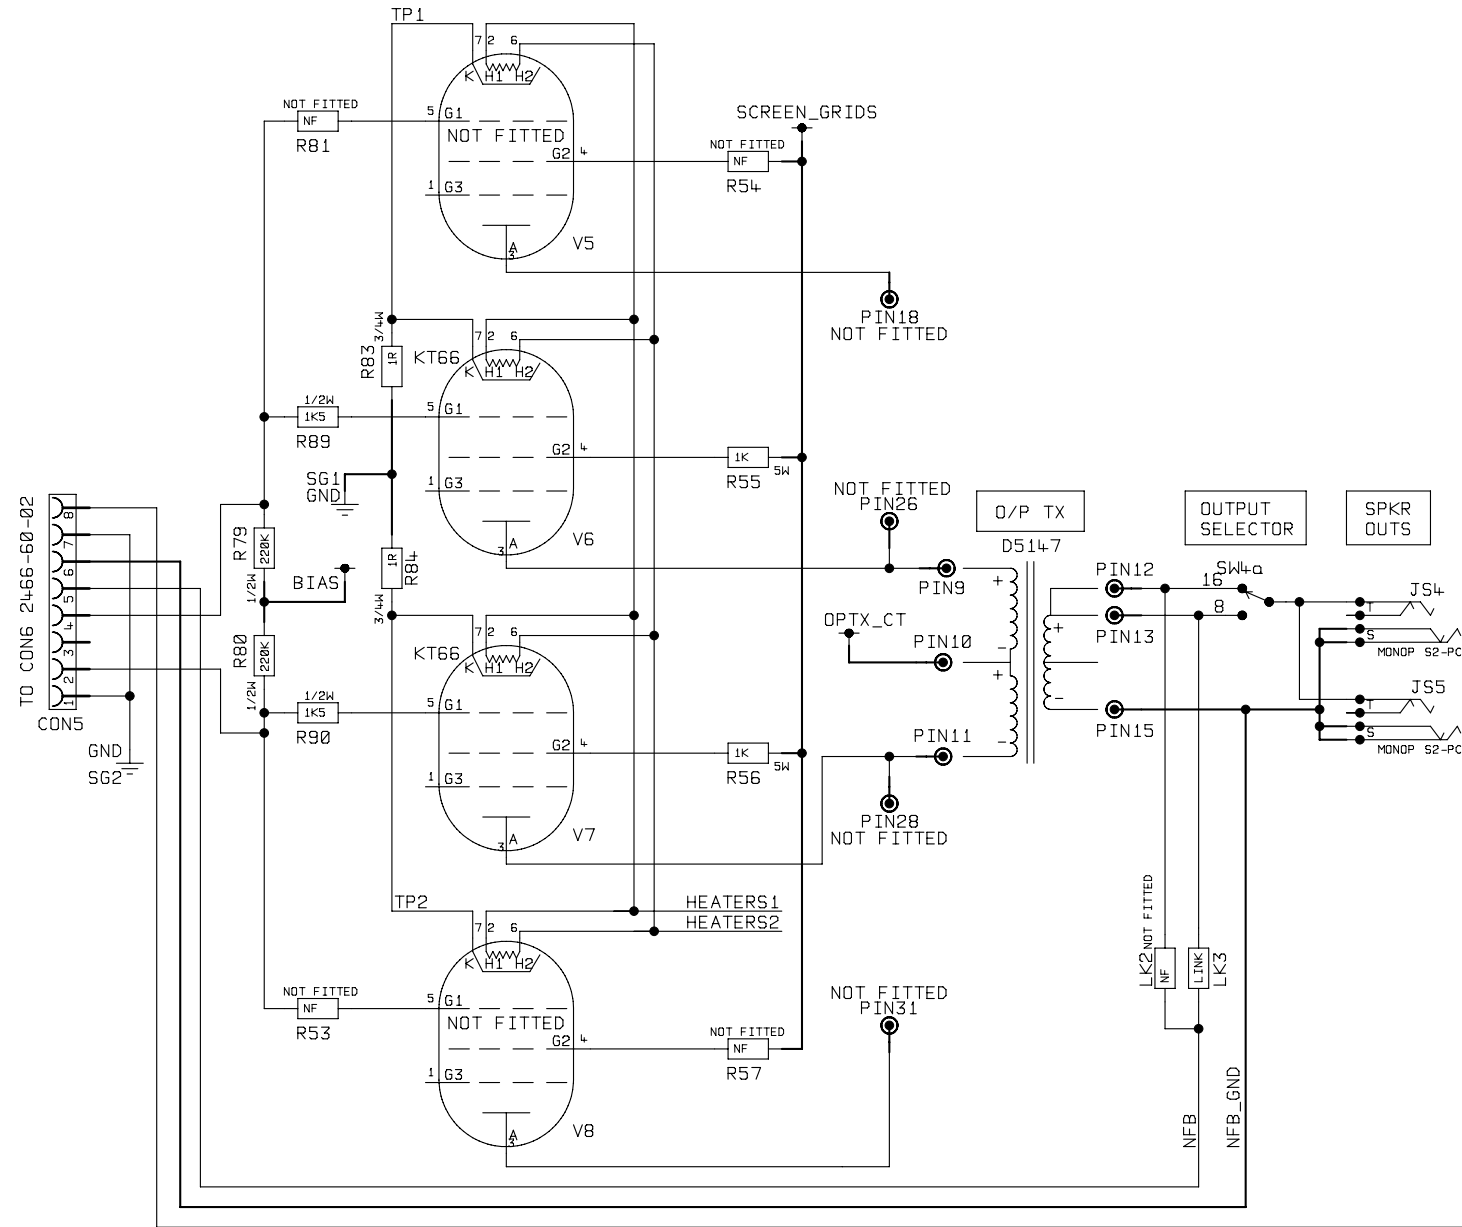

SAFETY CRITICAL COMPONENT
REPLACE ONLY WITH SAME TYPE AND RATING

ignorelayers 4

DRAWN	S.R.D.	DATE	05-09-05				
MODEL	2266/C						
ISS	3	50W DRG RELEASED	23-11-06				
		ECO NUMBER	CHK	DATE			

Marshall

© MARSHALL AMPLIFICATION PLC
DENBIGH ROAD, BLETCHLEY, MILTON KEYNES, MK1 1DQ.
TEL (01908) 375411 FAX (01908) 376118

TITLE	50W POWERAMP	
DWG.No	2266-61-02	ISS 3